

130U & 133U Dump Body

*A continued tradition
since the early 1900's*



Tough & Versatile


The Galion 130U and 133U bodies are designed for superior service on 9900 - 19500 GVWR cab/chassis'. These bodies feature a 3/16" high tensile steel floor, 10 gauge high tensile tailgate, head sheets and sides. The 133U is constructed with stainless steel while the 130U uses carbon steel. Front corner posts, smooth sides, full depth rear corner posts and boxed "material-shedding" top rails are also standard.



FULL FACTORY WARRANTY
complete parts and service available
through nationwide authorized distributors



Shown with options

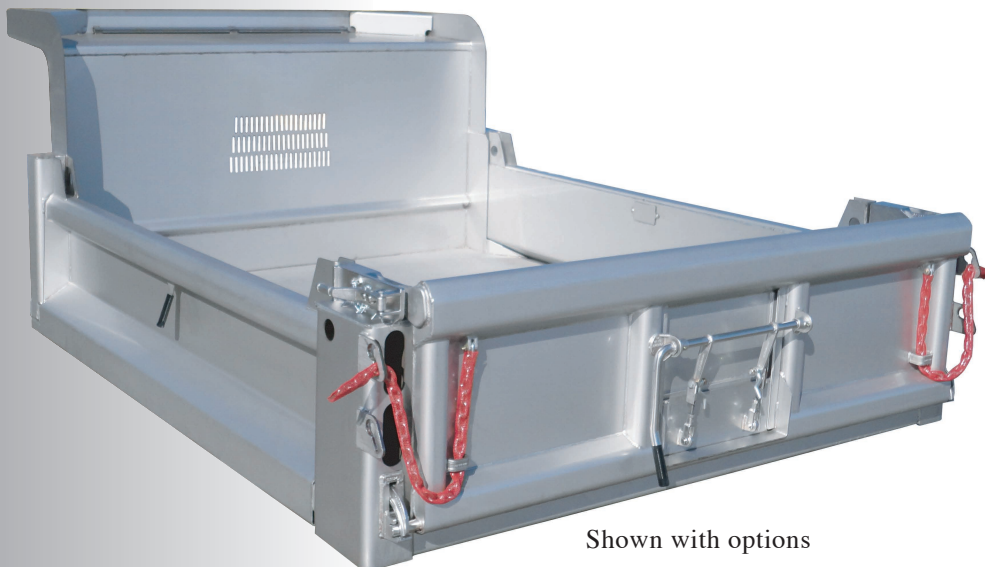

Shown with options

- *Available in lengths of 8' to 11'-6"*
- *Material-shedding boxed top rails*
- *Double acting tailgate*
- *10 gauge high tensile construction*
- *Crossmemberless understructure*
- *Quick release tailgate*

Visit Galion and all affiliated companies on the world wide web.
www.galiongodwin.com

130U & 133U Specifications:

General Dimensions:

Available in inside lengths from 8' through 11'-6", 84" inside width with 13" sides and 19" gate or 18" sides and 24" gate.

Sides:

10 Gauge high tensile steel with material shedding boxed top rails, full depth 10" rear corner post and low drag smooth design.

Floor:

3/16" high tensile steel 1 pc with 2" formed in place floor to side radius.

Front Bulkhead:

10 gauge high tensile steel construction with two bend top flange.

Tailgate:

10 gauge high tensile steel. 1 panel design with full perimeter box bracing, double acting design with long chains and two sets of banjo eyes.

Tailgate Hardware:

Heavy duty cast quick release top hardware and cast overshot lower hardware with manual release handle. All stainless on 133U.

Lights:

Meets all requirements of FMVSS108 with oval stop/tail/turn lights recessed in rear post. All lighting is recessed, shock mounted, complete with factory wiring harness.

Understructure:


Crossmemberless design using 3/16" X 100K steel formed into 5" trapezoid longbeams. Lubricated front and rear cross shafts and full width rear bolster.

Safety Features:

All complete Galion 130U and 133U bodies and hoist are shipped with a "body up" warning light and OSHA required back up alarm.

Options:


- 304 #4 stainless steel construction
- 304-2B stainless steel construction
- 201-LN2B stainless steel construction
- Coal door in gate
- Additional light holes
- LED lighting IOL incandescent
- Sleek cab protector (with or without window)
- Integral cab protector (with or without window)
- Bolt on spreader apron
- Fold down sides
- Pressed "V" side brace
- Vertical boxed bracing available for sides and tailgate
- Choose between GS515 or GS615 hoists with subframe
- Stainless floor and formed understructure available on the 133U

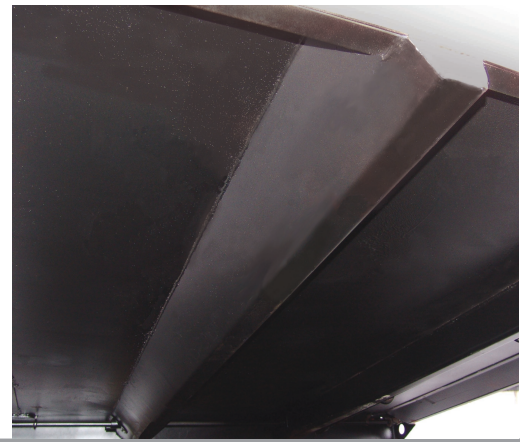

The crossmemberless understructure of the 130U & 133U Crossmemberless body uses 3/16" X 100K formed 5" trapezoidal longbeams.



Optional dropside with single lever release. Side drops well below deck level for easy cleanout.

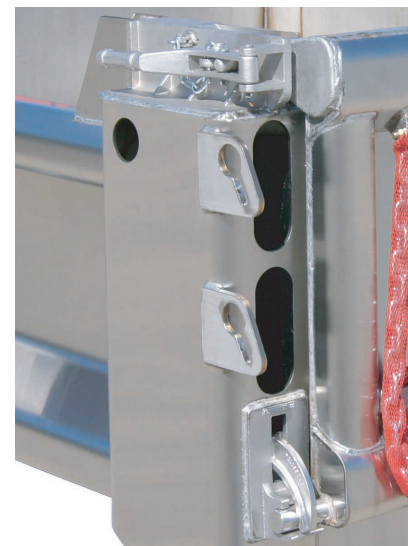

All hardware is stainless steel on the 133U.

Galion-Godwin Truck Body Co. LLC.
7415 Peabody-Kent Rd. Winesburg OH. 44690 P.O. Box 208
(877) 450-4794 Fax (330) 359-5660